


Residential Power

Never lack power !

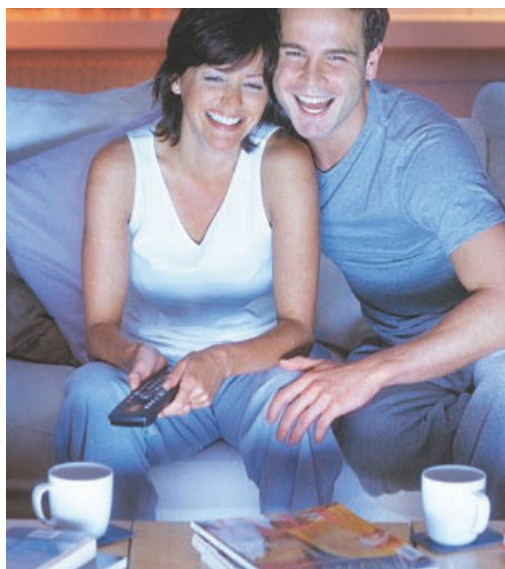

The generating sets in the new **Residential Power** range are of professional quality but are compact and sound insulated for home use. **SDMO®** generating sets are simple and practical and can be installed permanently outdoors. They start up automatically if there is a power cut, ensuring that life in the home can continue as normal – refrigerators and freezers will keep running, that heating and alarms systems will continue to operate and those working from home will not be disturbed.

Residential Power run off LPG or natural gas. They are quiet and environmentally friendly with low emissions.

Practical, automatic, simple: an alternative source of electricity that is always available !



Operating principle:

- The automatic transfer switch detects the presence of the mains and selects the power source.
- If there is a power cut, the automatic transfer switch starts the generating set and switches the power source to restore the electrical supply within a few seconds.
- When the mains electricity supply returns to normal, the automatic transfer switch switches back to the mains, turns off the genset and continues to monitor the mains supply.

* ATS : Automatic Transfer Switch

Mains supply OK

While the mains power supply is OK, the ATS* connects the mains to the distribution board.

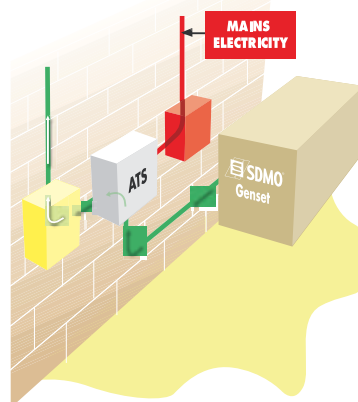

Power cut

When there is a power cut, the automatic transfer switch detects that there is no mains electricity and starts the generating set. The distribution board is then supplied from the genset which provides electricity to the home.



Residential Power

RES 13 EC 50_{Hz}

Single-phase generating set

- Automatic startup
- Natural gas or LPG
- Quiet and compact
- Easy to install



General specification 50 Hz

Max rating		
Natural gas	9,300 W	11,625 VA*
LPG	10,500 W	13,125 VA*
Noise ⁽³⁾	65 dB(A)@7m	
Engine	KOHLER	
Type	CH740	
Starter	Electric	
Displacement	0.725 L (44 in ³)	
Bore and stroke	67 mm x 83 mm (2.64" x 3.27")	
Speed	3,000 rpm	
Speed regulation	Electronic	
Consumption (75 %) ⁽¹⁾		
Natural gas	4.2 m ³ /h	
LPG ⁽²⁾	3.6 kg/h	
Length	1,123 mm (44.2 in)	
Width	726 mm (28.6 in)	
Height	804 mm (31.6 in)	
Net weight	182 kg (400 lbs)	
Standard equipment	Preheating Battery Charger	

*Power factor 0.8

⁽¹⁾As a guideline, the operating pressure of this Residential Power generating set is between 0.012 and 0.027 bar for natural gas and between 0.017 and 0.027 bar for LPG.

⁽²⁾1 kg = 0,535 m³.

⁽³⁾At no load.

Controls

- Digital hours counter display
- Digital display of electrical values
- Digital error code display
- Simplified configuration of main parameters
- Main switch (on/off, restart/auto)
- Alternator output 230 V – single phase
- Voltage regulator

Optional extras available

- "Verso" normal/back-up transfer switch: automatically controls switchover from mains to generating set and vice versa - 50 Hz - 230 V - 63 A or 100 A.
- Pack first: complete service kit comprising air filter, air pre filter, spark plugs and oil filter.
- Fixed differential protection: adjusted to the electrical system being used - 30 mA or 300 mA.
- Standard 12V 50Ah 450 CCA (EN) battery sold separately.

